


# Conical

without Volume Damper



## Product Data Sheet

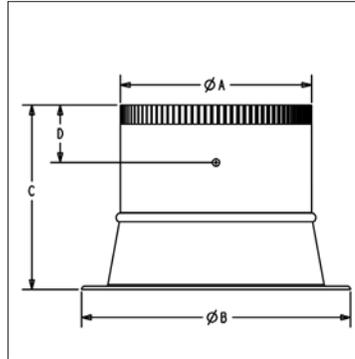

### Description

Elgen's Conical is used for Low Pressure Applications.

### Standard Construction

Collar- Formed using 24 GA ASTM A-653 G60 material  
 Body- Formed using 24 GA ASTM A-653 G60 material  
 1/8" x 1" Two Sided Neoprene Gasket

A (in)	B (in)	C (in)	D (in)
4	8	9.75	3
5	9	9.75	3
6	10	9.75	3
7	11	9.75	3
8	12	9.75	3
9	13	9.75	3
10	14	9.75	3
12	16	9.75	3
14	18	10.5	3
16	20	10.5	3

### Features

Zero Air Leakage at +40" W.G. (and -10" W.G.)  
 Meets SMACNA 2005 3rd Edition Section 4.8 Figure 4-6  
 Seam Welded- Adds strength and prevents air leakage  
 Body- is made with one piece of metal and has 1" Flange  
 Gasket - 1/8" x 1" Two Sided Neoprene Gasket  
 MADE IN USA with USA Steel  
 Union Made Yellow Label

### Optional Construction

Insulation Guard  
 Available with Elgen Super Standoff  
 Available in 1-piece construction

G90 Galvanized  
 Stainless Steel 304  
 Stainless Steel 316  
 Aluminum  
 PCD  
 Galvanneal (Paint Grip)  
 Agion (Antimicrobial Coating)

### Packaging

Size (in)	Tray Qty	Skid Qty	Weight per Skid (lbs)
4	MTO	MTO	N/A
5	MTO	MTO	N/A
6	9	210	350
7	MTO	MTO	N/A
8	9	112	250
9	MTO	MTO	N/A
10	9	84	240
12	9	63	200
14	9	42	160
16	9	35	155

### Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

### Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624  
 Tel: 800.503.9805 :: Fax: 201.964.9030  
 info@elgenmfg.com :: www.elgenmfg.com