


## Product Data Sheet

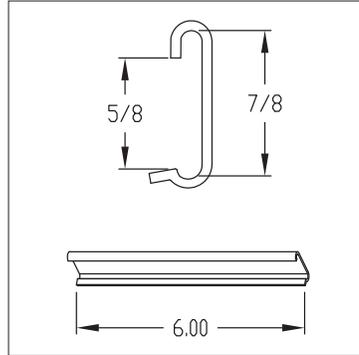

### Features

Meets SMACNA requirements (6" Length)  
Union Made

### Description

The Elgen F-Cleat is used on TDF (Transverse Duct Flange) formed on Flange. The Elgen F-Cleat is used on the perimeter of the TDF Flange, four bolt rectangular system. The use of the Elgen F-Cleat provides uniform compression for the 440 Butyl Gasket between the TDF Flange's for an energy efficient seal.

### Optional Construction

Stainless Steel 304  
Stainless Steel 316  
Aluminum  
PCD  
Galvanneal (Paint Grip)

### Standard Construction

Stamped from 20 Ga ASTM A-653 G60 material  
Weight(per box): 45 lbs

### Packaging

Box Qty	Skid Qty
500	40,000

### Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing  
10 Railroad Ave, Closter NJ 07624  
Tel: 800.503.9805 :: Fax: 201.964.9030  
info@elgenmfg.com :: www.elgenmfg.com