


Product Data Sheet

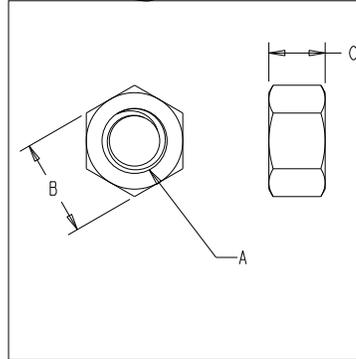

Features

Material Meets ASTM A563 Grade A.
 Dimensions: ASME/ANSI B18.2.2
 Zinc Plating meets ASTM F1941 FeZn3A
 Typical Hardness: HRB 68- HRC32
 Proof Load Strength: 90,000 PSI Min
 (Proof load is defined as an axially-applied load using a bolt or mandrel that must be supported by a nut without evidence of thread stripping or rupture.)

Description

Elgen's Hex nut is used in conjunction with all 4-bolt Flange systems.

Optional Construction

Stainless Steel 304
 Stainless Steel 316
 Aluminum

Standard Construction

Made from Low Carbon steel - ASTM A307 - Grade A.

Packaging

Item	Size (in)	Box Qty	Skid Qty
Hex Nut	3/8	4,000	144,000
Hex Nut	1/4	9,000	324,000

Nut Size (A)	Socket Size (B)	Thickness (C)	Nut Size (A)	Socket Size (B)	Thickness (C)
1/4	7/16	7/32	9/16	13/16	31/64
5/16	1/2	17/64	5/8	15/16	35/64
3/8	9/16	21/64	3/4	1-1/8	61/64
7/16	5/8	3/8	7/8	1-5/16	3/4
1/2	3/4	7/16	1	1-1/2	55/64

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
 10 Railroad Ave, Closter NJ 07624
 Tel: 800.503.9805 :: Fax: 201.964.9030
 info@elgenmfg.com :: www.elgenmfg.com