


Press-On Collars



Product Data Sheet

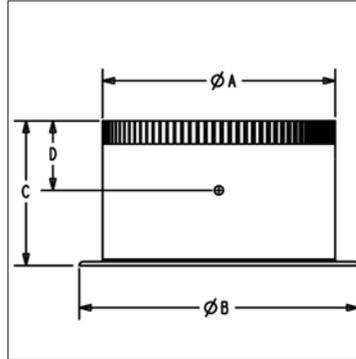

Description

Elgen's Press-On Collar is used for Low Pressure Applications.

Standard Construction

Manufactured using 24 GA ASTM A-653 G60 material
 1" Flange
 1/8" x 1" Two Sided Neoprene Gasket

A (in)	B (in)	C (in)	D (in)
4	6	6	3
5	7	6	3
6	8	6	3
7	9	6	3
8	10	6	3
9	11	6	3
10	12	6	3
12	14	6	3
14	16	6	3
16	18	6	3

Features

- Meets SMACNA requirements - 2005 3rd Edition Section 4.8 Figure 4-6
- Made from one piece of metal
- Welded Seam for added strength and low leakage
- Pressure rating +40" Water gauge
- Gasket - 1/8" x 1" Two Sided Neoprene Gasket
- MADE IN USA with USA Steel
- Union Made Yellow Label

Optional Construction

- All Volume Dampers for air control
- Insulation Guard
- 30 GA Galvanized
- G90 Galvanized
- Stainless Steel 304
- Stainless Steel 316
- Aluminum
- PCD
- Galvanneal (Paint Grip)
- Agion (Antimicrobial Coating)

Packaging

Size (in)	Tray Qty	Skid Qty	Weight per Skid (lbs)
4	MTO	MTO	N/A
5	MTO	MTO	N/A
6	9	300	310
7	MTO	MTO	N/A
8	9	200	280
9	MTO	MTO	N/A
10	9	120	210
12	9	90	200
14	9	90	220
16	9	90	180

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
 10 Railroad Ave, Closter NJ 07624
 Tel: 800.503.9805 :: Fax: 201.964.9030
 info@elgenmfg.com :: www.elgenmfg.com