


Product Data Sheet

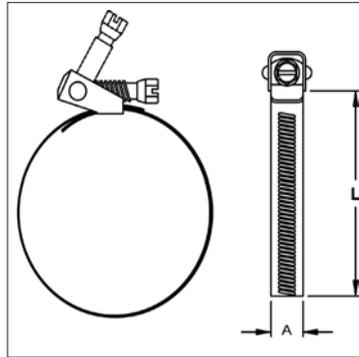

Description

Stainless steel flex ties used to connect flexible piping to ductwork.

Features

Heavy duty adjustable mechanism for secure fit adjusts easily with a screwdriver
Zinc plated/stainless steel to prevent corrosion

Standard Construction

Screw:

5/16" hex-head
Zinc-plated yellow dichromate carbon steel

Band and Housing:

9/16" wide
Stainless Steel
Non-Magnetic

Bridge:

Zinc-plated yellow dichromate carbon steel

Maximum Diameter (in)	Width (in) A	Length (in) L
6	9/16	22
8	9/16	28.5
10	9/16	35
12	9/16	39
16	9/16	55
20	9/16	72

Packaging

Size	Box Qty
6	200
8	200
10	200
12	200
16	200
20	100

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com