


THREADED ROD COUPLINGS



Product Data Sheet

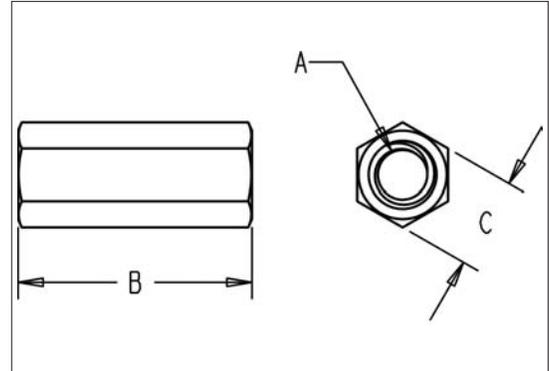

Description

Threaded Rod Coupling

Optional Construction

Stainless Steel 304
Stainless Steel 316

Standard Construction

Manufactured from Low Carbon Steel (1008 / 1010), meet ASTM A563 Grade A.

Zinc Plating: Purchased to meet ASTM F1941 FeZn3A

Hot-Dip Galvanized: Purchased to meet ASTM A153.

HDG nuts are tapped oversize per ASTM A563.

Hardness: HRB 68 – HRC 32

Proof Load Strength: 90,000 PSI Minimum (68,000 PSI for HDG nuts)

Thread Size A	Width Across Flats (in) C			Length (in) B		
	Basic	Max	Min	Basic	Max	Min
1/4-20	7/16	0.438	0.428	1-1/2	1.51	1.49
3/8-16	1/2	0.500	.489	1-1/8	1.124	1.066
1/2-13	11/16	0.688	0.663	1-3/4	1.75	1.69
5/8-11	13/16	0.813	0.782	1-7/8	1.89	1.86
3/4-10	1	1	0.963	2-1/4	2.25	2.19

Packaging

Size	Qty Per Box
1/4"	2,500 or 100
3/8"	1,250 or 100
1/2"	800 or 100

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624

Tel: 800.503.9805 :: Fax: 201.964.9030

info@elgenmfg.com :: www.elgenmfg.com