


Universal Cleat



Product Data Sheet

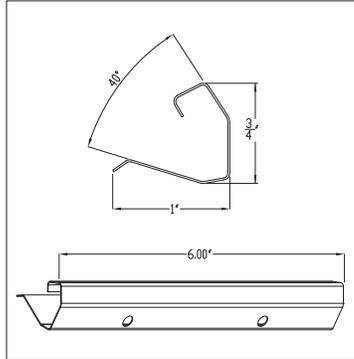

Features

Meets SMACNA requirements (6" Length)
Union Made
I

Description

Elgen's Universal Cleat is compatible on all flange systems except H. The Universal Cleat is used on the perimeter of the Flange, four bolt rectangular system. The use of the Universal Cleat provides uniform compression for the 440 Butyl Gasket between the Flange's for an energy efficient seal.

Optional Construction

Stainless Steel 304
Stainless Steel 316
Aluminum
PCD
Galvanneal (Paint Grip)

Standard Construction

Stamped from 22 and 20 GA ASTM A-653 G60 material

Weight(per box)(22 GA): 33 lbs

Weight(per box)(20 GA): 40 lbs

Packaging

| Gauge | Box Qty | Skid Qty |
|-------|---------|----------|
| 22 | 300 | 38,400 |
| 20 | 300 | 28,800 |

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624

Tel: 800.503.9805 :: Fax: 201.964.9030

info@elgenmfg.com :: www.elgenmfg.com